

8-0217-5, 8-0217-6, 8-0217-7

5 x 5 outrigger beam


Outrigger Counterweight Chart

		Reach (in.)											
		74"	66"	60"	54"	48"	42"	36"	30"	24"	18"		
Hoist Rated Load (lb)	750	40 24 22	33 21 19	29 19 17	25 16 15	21 14 13	18 12 11	15 10 9	12 8 8	9 7 6	7 5 5	16'	22' 25'
	1000	Not Allowed	44 28 25	38 25 22	33 21 19	28 19 17	24 16 14	20 13 12	16 11 10	12 9 8	9 6 6	16'	22' 25'
	1250	Not Allowed	Not Allowed	Not Allowed	41 27 24	35 23 21	29 20 18	24 17 15	20 14 12	15 11 10	11 8 7	16'	22' 25'
	1500	Not Allowed	Not Allowed	Not Allowed	Not Allowed	42 28 25	35 24 21	29 20 18	23 16 15	18 13 12	13 9 9	16'	22' 25'
		Number of 50 lb. Counterweights										Outrigger Length (ft.)	

Fulcrum Point Load Chart

		Reach (in.)											
		74"	66"	60"	54"	48"	42"	36"	30"	24"	18"		
Hoist Rated Load (lb)	750	5000	4650	4450	4250	4050	3900	3750	3600	3450	3350	16'	22'
		4200	4050	3950	3800	3700	3600	3500	3400	3350	3250	22'	25'
		4100	3950	3850	3750	3650	3550	3450	3400	3300	3250	25'	
	1000	Not Allowed	6200	5900	5650	5400	5200	5000	4800	4600	4450	16'	22'
		5400	5250	5050	4950	4800	4650	4550	4450	4300	22'	25'	
		5250	5100	4950	4850	4700	4600	4500	4400	4300	25'		
1250	Not Allowed	Not Allowed	Not Allowed	7050	6750	6450	6200	6000	5750	5550	16'	22'	
				6350	6150	6000	5850	5700	5550	5400	22'	25'	
				6200	6050	5900	5750	5600	5500	5350	25'		
1500	Not Allowed	Not Allowed	Not Allowed	Not Allowed	8100	7750	7450	7150	6900	6650	16'	22'	
					7400	7200	7000	6800	6650	6450	22'	25'	
					7250	7050	6900	6750	6600	6450	25'		

Fulcrum point loads are divided by 2 when 701960-1 or 701960-2 are used with 8-0217 series beams.

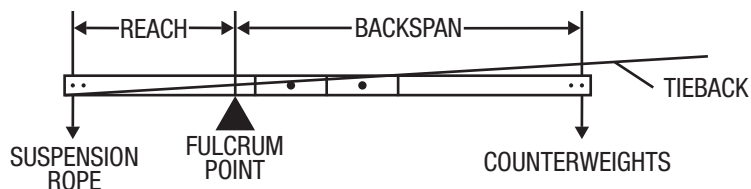

16' Outrigger: 8-0217-6



22' Outrigger: 8-0217-7



25' Outrigger: 8-0217-5